

## C31 Combination Unit with Protective Frame

**Application:**

Provides downstream air preparation with protection and convenience.

**Features:**

Include components:

- C31-08AMB 1" FRL with metal bowls and auto drain filter
- BBLV100 1" brass ball valve and AM12 air king on inlet port
- BBV100DTW 3-way ball valve installed between regulator and lubricator provides option for non-lubricated air
- heavy duty frame protects air prep components
- operating:
  - maximum pressure: **250 PSIG**
  - temperature range: **40°F to 150°F (4°C to 66°C)**
  - flow: 320 SCFM




Pneumatic Accessories

Size	Part #
1"	<b>C31-08FRAME</b>

## F23 Exhaust Muffler

**Features:**

- The contaminants in the exhaust flow are mechanically separated and twice filtered to 5 micron levels. The clean, muffled exhaust flows out of the unit under the metal hood on top.
- removes oily aerosols from exhaust flows
- one inlet port
- 5 micron element
- quick disconnect clamp ring for easy bowl removal
- manual drain
- operating:
  - maximum pressure: **150 PSIG (10.3 bar)**
  - temperature range: **32°F to 125°F (0°C to 52°C)**

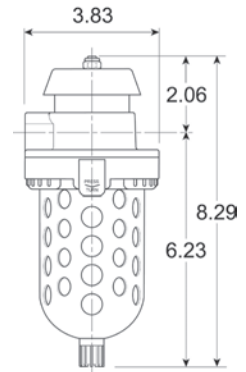

Size	Flow @ 90 PSI	Transparent Bowl with Guard Part #
½"	240 SCFM	<b>F23-04M</b>

FRL's are designed for air service only, unless otherwise indicated.