

### Grooved End Fittings - Series 45

**Feature**

- Designed to provide minimum pressure drop and uniform strength

**Material**

- Ductile iron body with rust inhibiting paint

**Specification**

- Maximum operating pressure: **500 PSI** at ambient temperature **70°F (21°C)**

Nominal Size	Dimensions C to E	Ductile Iron Part #
2"	2"	L2045
2-1/2"	2-1/4"	L2545
3"	2-1/2"	L3045
4"	3"	L4045
5"	3-1/4"	L5145
6"	3-1/2"	L6045
8"	4-1/4"	L8045


**Series-45**

**Approvals**

- Underwriters Listed and Factory Mutual approved

**Comparable to**

- Victaulic's #110
- Grinnell's #7051

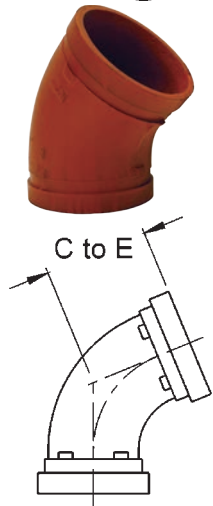

**Feature**

- Designed to provide minimum pressure drop and uniform strength

**Material**

- Ductile iron body with rust inhibiting paint

**Specification**

- Maximum operating pressure: **500 PSI** at ambient temperature **70°F (21°C)**

Nominal Size	Dimensions C to E	Ductile Iron Part #
2"	3-1/4"	L502
2-1/2"	3-3/4"	L5025
3"	4-1/4"	L503
4"	5"	L504
6"	6-1/2"	L506
8"	7-3/4"	L508


**Series-90**

**Approvals**

- Underwriters Listed and Factory Mutual approved

**Comparable to**

- Victaulic's #10
- Grinnell's #7050

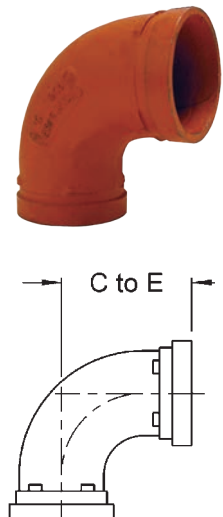

**Feature**

- Designed to provide minimum pressure drop and uniform strength

**Material**

- Ductile iron body with rust inhibiting paint

**Specification**

- Maximum operating pressure: **500 PSI** at ambient temperature **70°F (21°C)**

Nominal Size	Dimensions C to E	Ductile Iron Part #
2"	3-1/4"	T602
2-1/2"	3-3/4"	T6025
3"	4-1/4"	T603
4"	5"	T604
6"	6-1/2"	T606
8"	7-3/4"	T608

**Series-T**

**Approvals**

- Underwriters Listed and Factory Mutual approved

**Comparable to**

- Victaulic's #20
- Grinnell's #7060

